

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 1 187 475 A1**

(12)

**EUROPEAN PATENT APPLICATION**

published in accordance with Art. 158(3) EPC

(43) Date of publication:  
13.03.2002 Bulletin 2002/11

(51) Int Cl.7: **H04N 5/91, H04N 5/92,  
G11B 27/034**

(21) Application number: **01904337.1**

(86) International application number:  
**PCT/JP01/00864**

(22) Date of filing: **07.02.2001**

(87) International publication number:  
**WO 01/60062 (16.08.2001 Gazette 2001/33)**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Ishige, Masafumi Sony Corporation  
Tokyo 141-0001 (JP)**

(74) Representative: **DeVile, Jonathan Mark, Dr. et al  
D. Young & Co  
21 New Fetter Lane  
London EC4A 1DA (GB)**

(30) Priority: **08.02.2000 JP 2000030528**


(71) Applicant: **Sony Corporation  
Tokyo 141-0001 (JP)**

**(54) METHOD AND APPARATUS FOR VIDEO DATA RECORDING**

(57) A time from covering to edit or broadcast is shortened and also management and handling of materials are made simpler.

Encoder 1A compresses digital video signal DVS obtained by camera into encoded data DVA of low resolution. Encoder 1B compresses the digital video signal DVS into encoded data DVB of high resolution. The encoded data DVA of low resolution and encoded data DVB of high resolution are stored in storage medium 4.

Moreover, the encoded data DVA of low resolution is transmitted to broadcasting station by transmitter 7 simultaneously with storing in the storage medium 4. In the broadcasting station, edit is performed based on the encoded data DVA of low resolution and edit decision list is transmitted to video recording apparatus. The edit decision list is stored in the storage medium 4. When the storage medium 4 is brought into the broadcasting station, the encoded data DVB of high resolution is broadcast in accordance with edit decision list.

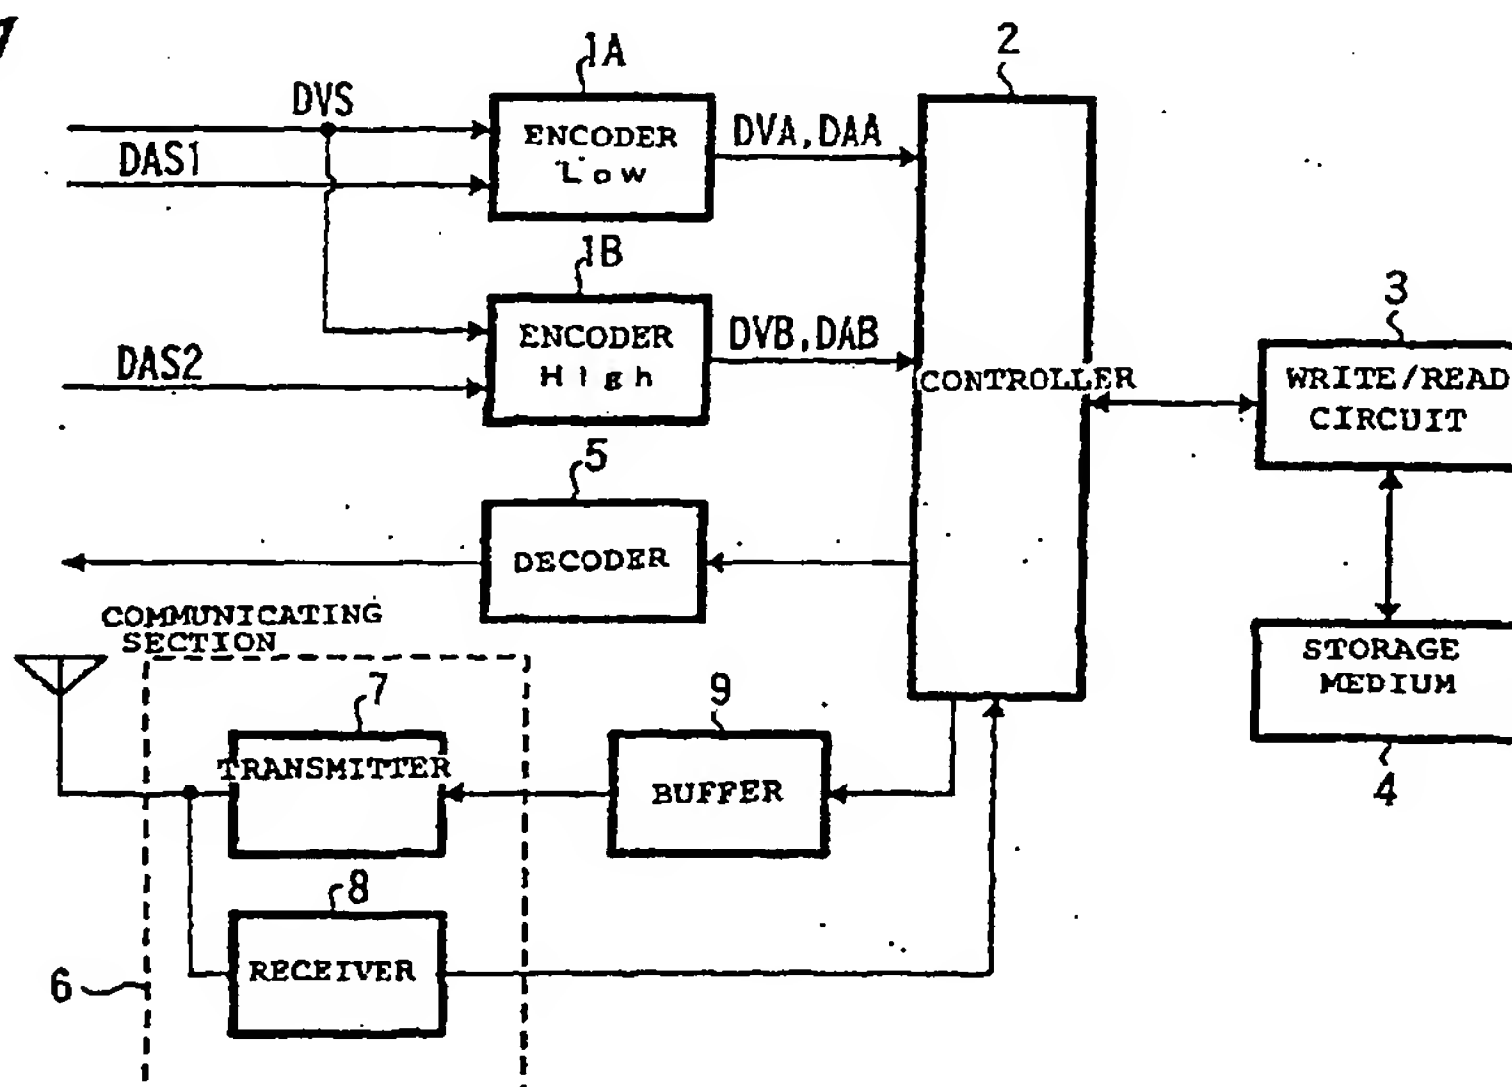**FIG. 1**

## Description

### TECHNICAL FIELD

[0001] The present invention relates to a video recording apparatus for recording materials obtained by taking an image at the scene of gathering materials in a recording medium capable of random access.

### BACKGROUND ART

[0002] In a conventional video recording apparatus for recording images taken by a camera at the scene of collecting materials together with sounds, the sounds and images have been recorded on a video tape such as a magnetic tape. In this case, the video tape on which the sounds and images are recorded is, for example, brought into a broadcasting station and the like where edit equipments are installed and then editing is performed as follows. The materials (audio and video data) are edited so that they may be put within a predetermined broadcasting time, or incidental text data such as scripts are prepared, or video processing for switching scenes is performed and so on. The thus edited contents are prepared as an edit decision list (EDL). After the edit, the materials will be broadcast in accordance with the edit decision list.

[0003] By the way, in the video recording apparatus according to prior art, material tapes must be brought into the broadcasting station and a long time is required from gathering materials through edit to broadcast. This involves a problem. Moreover, in the above editing work, materials of original video tape (material tape) are dubbed in a video tape for that work and the edit decision list is prepared using the video tape for the work (work tape). This raises another problem in which the management and handling of materials will be complex.

[0004] Furthermore, in recent years, a nonlinear editing device is employed, in which materials recorded in the material tape are stored in a recording medium capable of random access such as a hard disc device and then the materials are edited on its storage medium. In this case, the editing work itself can be done more simply and besides in a short time as compared with an editing work using the video tape. However, the material tape must also be brought into the broadcasting station and materials recorded on the material tape must be transferred to the storage medium. This also raises the same problem as in the above-mentioned technique, in which a long time is required from gathering materials through edit to broadcast.

[0005] Therefore, the object of the present invention is to provide a video data recording apparatus and a video data recording method which are capable of reducing a time required from the gathering to edit or broadcast and also capable of making the management and handling of materials simpler.

## DISCLOSURE OF THE INVENTION

[0006] To attain the above object, a video data recording apparatus according to the invention set forth in claim 1 comprises:

a first data processing means for compressing inputted video data by a first compression rate to output a first encoded data;

a second data processing means for compressing said inputted video data by a compression rate higher than said first compression rate to output a second encoded data;

a storing means for storing at least said first encoded data outputted from said first data processing means in a storage medium;

a transmitter means for transmitting said second encoded data outputted from said second data processing means to outside; and

a receiver means for receiving at least an edit decision list based on said second encoded data inputted from the outside.

[0007] In the above video data recording apparatus, said edit decision list received by said receiver means is supplied to said storing means and is stored together with said first encoded data in said storage medium.

[0008] A video data recording method according to the invention set forth in claim 6 comprises the steps of:

a first step of compressing inputted video data by a first compression factor to output a first encoded data and also compressing said inputted video data by a second compression factor higher than said first compression factor to output a second encoded data;

a second step of storing at least said first encoded data in a storage medium;

a third step of transmitting said second encoded data to the outside;

a fourth step of receiving at least an edit decision list based on said second encoded data inputted from the outside; and

a fifth step of storing said edit decision list received in said fourth step in said storage medium.

[0009] In the present invention, predetermined video signals are compressed to form the first encoded data by the first data processing means and also the video signals are compressed to form the second encoded data so that the amount of data may be made smaller than that of the first encoded data by the second data processing means. Then, at least the first encoded data generated by the first data processing means are stored in the storage medium. At this moment, the transmitter means transmits the second encoded data generated by the second data processing means to an editing device different from the present apparatus. Therefore, the

recording and editing can be performed almost simultaneously with each other and the time required from the gathering to edit or broadcast can be shortened. Moreover, because it is arranged that the edit decision list indicating edit contents edited by the above editing device is received by the receiver means and then the edit decision list is stored together with the first encoded data in the storage medium, the management and handling of materials can be made simpler.

## BRIEF DESCRIPTION OF DRAWINGS

### [0010]

FIG. 1 is a block diagram showing the structure of a recording system of a video recording apparatus according to an embodiment of the present invention.

FIG. 2 is a schematic diagram showing a rough structure of a broadcasting system in which a video recording apparatus according to the present embodiment is employed.

FIG. 3 is a flow chart of processings performed by controller 2 of the video recording apparatus according to the present embodiment.

## BEST MODE FOR CARRYING OUT THE INVENTION

[0011] An embodiment according to the present invention will be described below with reference to the drawings.

### A. Structure of the embodiment

[0012] FIG. 1 is a block diagram showing the structure of a recording system of a video recording apparatus according to an embodiment of the present invention. In this figure, an encoder 1A compresses sequentially digital video signals DVS supplied from a camera unit not shown in accordance with a format prescribed in MPEG (Moving Picture Experts Group) with such a low resolution that the DVS signals may fall within an amount of data which can be transmitted to and received by an editing device, etc. in a remote place without any stress by radio or by wire. The resultant encoded data DVA of low resolution are supplied to a controller 2 and a communicating section 6. Also, the encoder 1A compresses digital audio signals DAS1 of low sound quality, which is acquired by a microphone not shown and sampled at a low sampling rate. The resultant audio data DAA of low sound quality are supplied to the controller 2 and communicating section 6.

[0013] Next, an encoder 1B compresses sequentially, in the same way as in the encoder 1A, the digital video signal DVS in accordance with the format prescribed in MPEG with such a high resolution relative to the encoder 1A, that is usable for broadcasting. The resultant encoded data DVB of high resolution are supplied to the

controller 2. Also, the encoder 1B compresses digital audio signal DAS2 of high sound quality, sampled at a high sampling rate. The resultant audio data DAB of high sound quality are supplied to the controller 2.

5 [0014] The controller 2 supplies the encoded data DVA of low resolution and the audio data DAA of low sound quality as well as the encoded data DVB of high resolution and the audio data DAB of high sound quality to a write/read circuit 3 on a timeshared basis. Also, the  
10 controller 2 supplies the encoded data DVA of low resolution and the audio data DAA of low sound quality or the encoded data DVB of high resolution and the audio data DAB of high sound quality to a decoder 5 and also supplies the encoded data DVA of low resolution and the audio data DAA of low sound quality to the commu-  
15 nicating section 6 through a buffer 9.

[0015] The write/read circuit 3 stores sequentially the encoded data DVA of low resolution and the audio data DAA of low sound quality as well as the encoded data  
20 DVB of high resolution and the audio data DAB of high sound quality, which are supplied on the time shared basis in a storage medium 4. Also, the write/read circuit 3 supplies the encoded data DVA of low resolution and the audio data DAA of low sound quality or the encoded  
25 data DVB of high resolution and the audio data DAB of high sound quality which are recorded in the storage medium 4 to the controller 2.

[0016] The storage medium 4 is made of a large capacity of storage medium capable of random access, which can record a plurality of materials. The present  
30 embodiment uses an optical disc as the storage medium, but the present invention is not limited thereto and may use a magnetic recording medium such as a hard disc device, if it can be miniaturized and have a large capacity.

[0017] Next, the decoder 5 expands the encoded data DVA of low resolution and the audio data DAA of low sound quality or the encoded data DVB of high resolution and the audio data DAB of high sound quality supplied from the controller 2. The resultant signals are sent  
40 out to external terminals or a viewfinder not shown.

[0018] The communicating section 6 includes a transmitter 7 and a receiver 8. The transmitter 7 transmits the encoded data DVA of low resolution and the audio data  
45 DAA of low sound quality supplied from the controller 2 through the buffer 9 directly to another computer or a broadcasting station described below, or through a communications satellite to a broadcasting station. Additionally, the buffer 9 is provided for transmitting the encoded  
50 data DVA of low resolution and the audio data DAA of low sound quality at a predetermined transmission speed from the transmitter 7. The other computer or broadcasting station equipped with editing machinery or editing means (including software) uses the aforesaid  
55 encoded data DVA of low resolution and audio data DAA of low sound quality in order to perform the following edits. Materials (audio and video data) are edited so that they may fall within a predetermined broadcasting time,



or incidental text data such as scripts are prepared, or video processing for switching scenes is performed and so on. The thus edited contents are transmitted again to the present recording apparatus as the edit decision list. In this connection, the data transmitted from the transmitter 7 may further include metadata incidental to video and audio data, such as photographing date and time, name of photographer or the like. This will serve for making the edit operation effective based on the contents of this metadata during edit.

[0019] The receiver 8 receives the edit decision list with respect to the encoded data DVA of low resolution and the audio data DAA of low sound quality, which is transmitted from the other computer or broadcasting station, and supplies it to the controller 2. In addition, the communicating section 6 may be such one that transmits data using radio channels employed by PHS (Personal Handyphone System) or portable telephone, or using radio or wired channel having a bandwidth other than those which are already employed by some communication system, as long as a bi-directional data transmission is possible. When an analog channel is used, a modem which performs digital-to-analog conversion or analog-to-digital conversion is required. The above described edit decision list is stored in the storage medium 4 through the controller 2 and the write/read circuit 3. Further, the receiver 8 can receive, in addition to the edit decision list, the aforementioned metadata such as editing date and time (into a unit of frame), as well as data on editor's name and informing date and time from the other computer or broadcasting station.

#### B. Operation of the embodiment

[0020] Next, the operation of the video recording apparatus according to the above embodiment will be described. FIG. 2 is a schematic diagram showing a rough structure of a broadcasting system in which the video recording apparatus according to the present embodiment is employed. The encoder 1A compresses the digital video signals DVS which are converted to digital data after being acquired by a camera unit not shown, into the encoded data DVA of low resolution. It also compresses the digital audio signals DAS1 of low sound quality which are sampled at a low sampling rate after being acquired by a microphone not shown, into the audio data DAA of low sound quality. These resultant data are both supplied to the controller 2.

[0021] Also, the encoder 1B compresses the above digital video signals DVS into the encoded data DVB of high resolution and compresses the digital audio signals DAS2 of high sound quality which are sampled at a high sampling rate, into the audio data DAB of high sound quality. These resultant data are both supplied to the controller 2. The encoded data DVA of low resolution and the audio data DAA of low sound quality as well as the encoded data DVB of high resolution and the audio data DAB of high sound quality are supplied from the

controller 2 to the write/read circuit 3 on a time-shared basis. The write/read circuit 3 stores them in the storage medium 4.

[0022] Moreover, the encoded data DVA of low resolution and the audio data DAA of low sound quality are also supplied to the transmitter 7 of the communicating section 6 through the buffer 9 simultaneously with storing them in the storage medium 4. The transmitter 7 reads the encoded data DVA of low resolution and the audio data DAA of low sound quality out of the buffer 9 correspondingly to the transmission speed. After modulating the read-out data, the transmitter 7 transmits them, for example, through a communications satellite 11 to a broadcasting station 12. Alternatively, the encoded data DVA of low resolution and the audio data DAA of low sound quality may be read out of the storage medium 4 by the write/read circuit 3 in response to user's operation after recording and then transmitted by the transmitter 7 of the communicating section 6, besides being transmitted simultaneously with recording.

[0023] The broadcasting station 12 receives the encoded data DVA of low resolution and the audio data DAA of low sound quality transmitted by the video recording apparatus 10 and stores them in an editing device 13. The editing device 13 edits the materials (audio and video data) so as to put it within a predetermined broadcasting time, or performs a video processing for changing over a scene, or prepares incidental text data such as scripts. The resultant edited contents are transmitted again to the video recording apparatus 10 through the communications satellite 11 as the edit decision list including the text data. The encoded data DVA of low resolution or/and the audio data DAA of low sound quality after editing may be up-loaded at once from the broadcasting station 12 for use in web pages on the Internet for the purpose of introducing programs or the like.

[0024] In addition, the encoded data DVA of low resolution and the audio data DAA of low sound quality may be transmitted, for example, to a computer 14 which is located near editing machinery and has a edit function which enables a producer, etc. to edit while checking recording conditions. In this case, the editing work is performed in that computer 14. Then, the edited contents are transmitted again to the video recording apparatus 10 from the computer 14 as the edit decision list. The video recording apparatus 10 receives the edit decision list by the receiver 8 of the communicating section 6 and stores them in the storage medium 4 through the controller 2 and the write/read circuit 3.

[0025] That storage medium 4 is brought into the broadcasting station 12 and then the encoded data DVB of high resolution and the audio data DAB of high sound quality are read out of the storage medium for decoding. The resultant signals are broadcast in accordance with the edit decision list stored.

[0026] Additionally, although the encoded data DVA of low resolution and the audio data DAA of low sound

quality as well as the encoded data DVB of high resolution and the audio data DAB of high sound quality are stored in the same medium in the above embodiment, it may be arranged that one of them (e.g., the encoded data DVB of high resolution and the audio data DAB of high sound quality) is stored in a storage medium such as an optical disc and the other (e.g., the encoded data DVA of low resolution and the audio data DAA of low sound quality) is stored in another medium such as a semiconductor memory.

[0027] Next, processings performed by the controller 2 of the video recording apparatus will be described with reference to FIG. 3.

FIG. 3 is a flow chart showing a sequence of processings performed by the controller 2 described above.

First of all, in step S100, the encoded data DVA, DAA of high resolution and encoded data DVB, DAB of low resolution outputted from the encoder 1A and 1B are inputted.

Next, in step S101, the encoded data DVA, DAA of high resolution and encoded data DVB, DAB of low resolution inputted in step S100 are supplied to the write/read circuit 3 on a timeshared basis. Both of the encoded data DVA, DAA and DVB, DAB supplied to the write/read circuit 3 are stored in the storage medium 4.

[0028] Next, processing moves to step S102, where the encoded data DVB, DAB of low resolution out of the encoded data inputted in step S100 are supplied to the buffer 9. This step is provided for causing the transmitter 7 to transmit them to the exterior editing device 14. The encoded data DVB, DAB of low resolution are edited in the editing device 14 and then the EDL indicating a result of the editing is inputted to the receiver 8. In step S103, it is decided whether or not the EDL is inputted from the receiver 8 to the controller 2.

[0029] The controller 2 repeats the action of step S103 until the EDL is inputted thereto from the receiver 8.

When the EDL is inputted from the receiver 8 (in case of YES in step S103), processing moves to step S104, where the received EDL is supplied to the write/read circuit 3. The supplied EDL is stored in the storage medium 4 through the write/read circuit 3, thus making processings come to an end.

[0030] According to the above described embodiment, because an editing work can be carried out almost simultaneously with recording, it will be possible to reduce a time required for obtaining the edited materials from its recording. Moreover, because the preparation of scripts or the up-loading to web pages of the Internet is enabled based on the encoded data DVA of low resolution and the audio data DAA of low sound quality, it will be possible to realize a prompt distribution of information. Furthermore, because the storage medium 4 is a nonlinear device, a cheap existing communication network such as asynchronous public channel or computer network, etc. can be employed for transmission, so that it can be realized at low cost. In addition, because the

materials of high resolution, the edit decision list, scripts and other various information on materials which are used for broadcast are stored in a single storage medium 4, a collective management is enabled. Accordingly, the management and handling of materials can be made simpler. Further, because the materials used in edit are the data of low resolution, even if there is only a channel of narrow bandwidth, a high speed transfer will be possible.

## INDUSTRIAL APPLICABILITY

[0031] The present invention is applicable to a video recording apparatus in which the editing work is performed almost simultaneously with recording. Moreover, the preparation of scripts or the up-loading to web pages of the Internet using the edited material is enabled. Furthermore, a communication channel network such as asynchronous public channel or computer network can be utilized for transmission.

## Claims

1. A video data recording apparatus comprising
  - a first data processing means for compressing inputted video data by a first compression rate to output a first encoded data,
  - a second data processing means for compressing said inputted video data by a compression rate higher than said first compression rate to output a second encoded data,
  - a storing means for storing at least said first encoded data outputted from said first data processing means in a storage medium,
  - a transmitter means for transmitting said second encoded data outputted from said second data processing means to outside, and
  - a receiver means for receiving at least an edit decision list based on said second encoded data inputted from the outside, wherein said edit decision list received by said receiving means is supplied to said storing means and is stored together with said first encoded data in said storage medium.
2. A video data recording apparatus according to claim 1, wherein
  - said receiver means receives, together with said edit decision list, incidental data to said second encoded data.
3. A video data recording apparatus according to claim 1, wherein
  - said transmitter means transmits, together with

said second encoded data, incidental data to said second encoded data.

4. A video data recording apparatus according to claim 2, wherein

said incidental data to said second encoded data are script data.

5. A video data recording apparatus according to claim 1, wherein

said storage medium is a recording medium capable of random access.

6. A video data recording method comprising the steps of

a first step of compressing inputted video data by a first compression ratio to output a first encoded data and also compressing said inputted video data by a second compression ratio higher than said first compression ratio to output a second encoded data,  
a second step of storing at least said first encoded data in a storage medium,  
a third step of transmitting said second encoded data to the outside,  
a fourth step of receiving at least an edit decision list based on said second encoded data inputted from the outside, and  
a fifth step of storing said edit decision list received in said fourth step in said storage medium.

7. A video data recording method according to claim 6, wherein

incidental data to said second encoded data are further received together with said edit decision list in said fourth step.

8. A video data recording method according to claim 6, wherein

incidental data to said second encoded data are further transmitted together with said second encoded data in said third step.

9. A video data recording method according to claim 7, wherein

said incidental data to said second encoded data are script data.

10. A video data recording method according to claim 6, wherein

said storage medium is a recording medium capable of random access.

11. A video data recording apparatus comprising

a first data processing means for outputting a first encoded data corresponding to inputted video data,

a second data processing means outputting second encoded data corresponding to said inputted video data and having lower resolution than resolution of said first encoded data,

a storing means for storing said first encoded data outputted from said first data processing means,

a transmitter means for transmitting said second encoded data outputted from said second data processing means to outside, and

a receiver means for receiving an edit decision list based on said second encoded data inputted from the outside.

12. A video data recording apparatus according to claim 11, wherein

said storing means stores said edit decision list received by said receiving means.

13. A video data recording apparatus according to claim 12, wherein

said storing means stores said edit decision list in an identical storage medium.


14. A video data recording apparatus according to claim 11, wherein

said storing means stores said second encoded data outputted from said second data processing means.

15. A video data recording apparatus according to claim 11, wherein

said first data processing means generates said first encoded data by compressing said inputted video data by a first compression rate, said second data processing means generates said second encoded data by compressing said inputted video data by a compression rate higher than said first compression rate.

FIG. 1

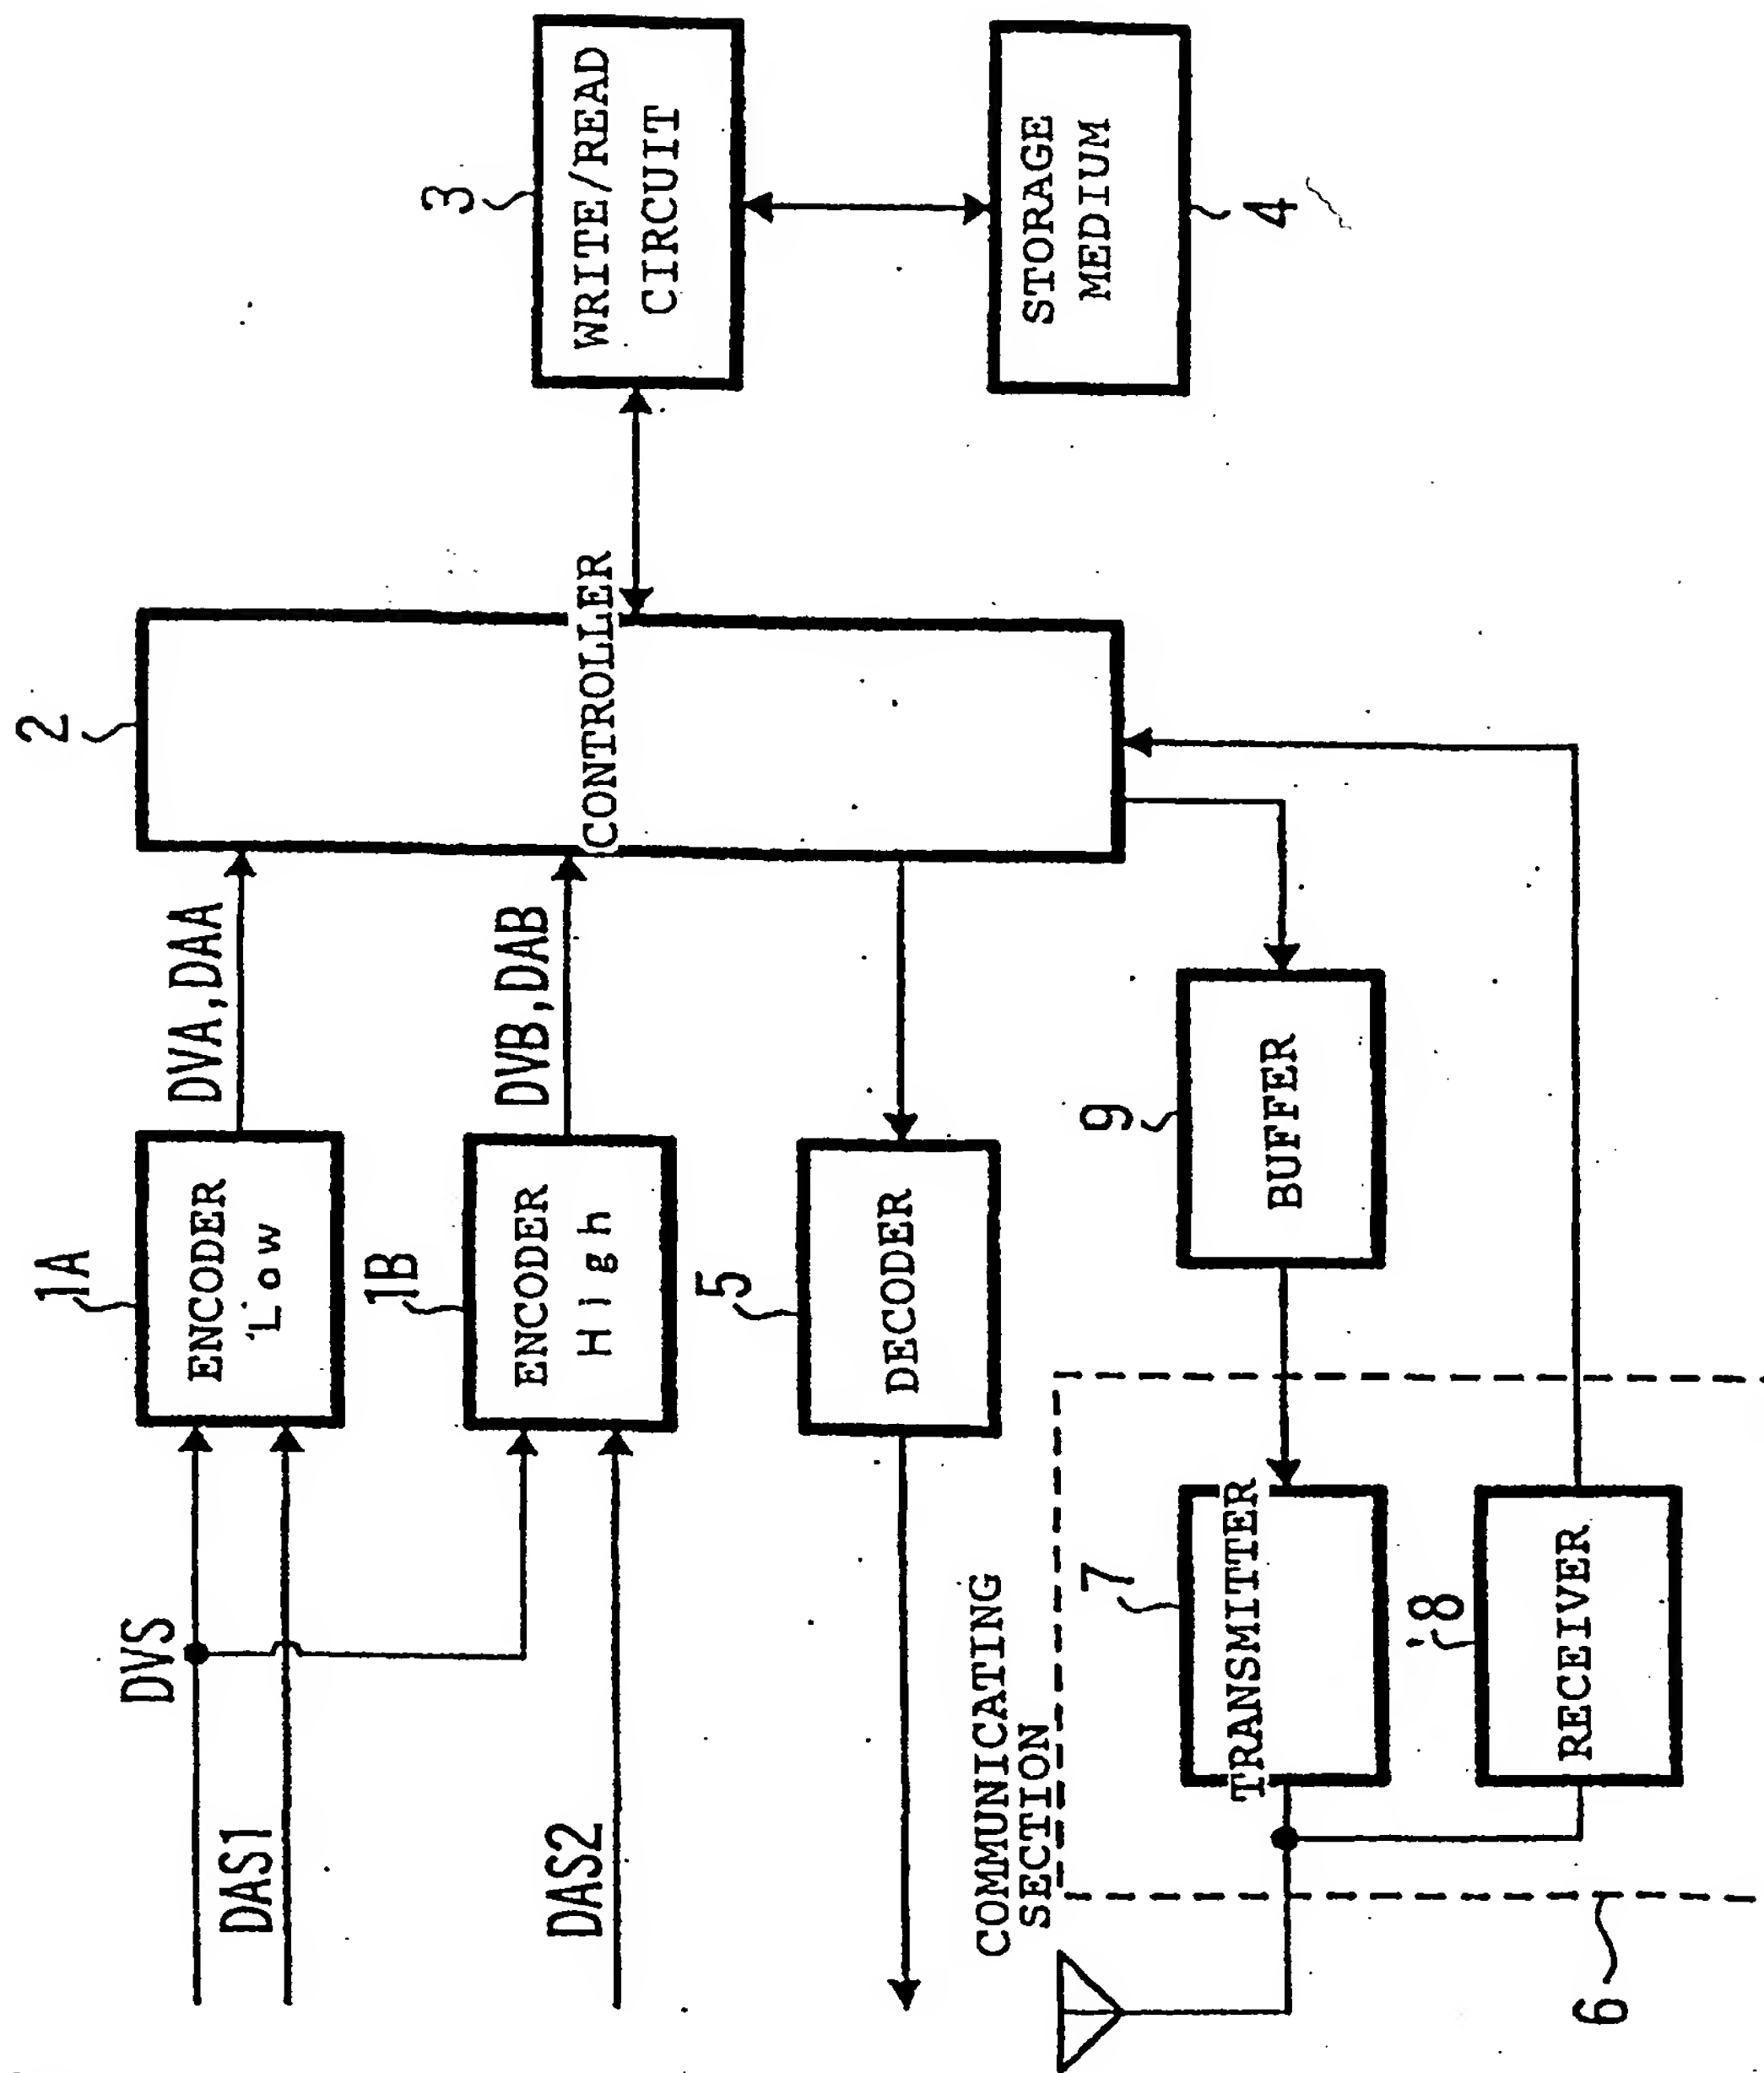




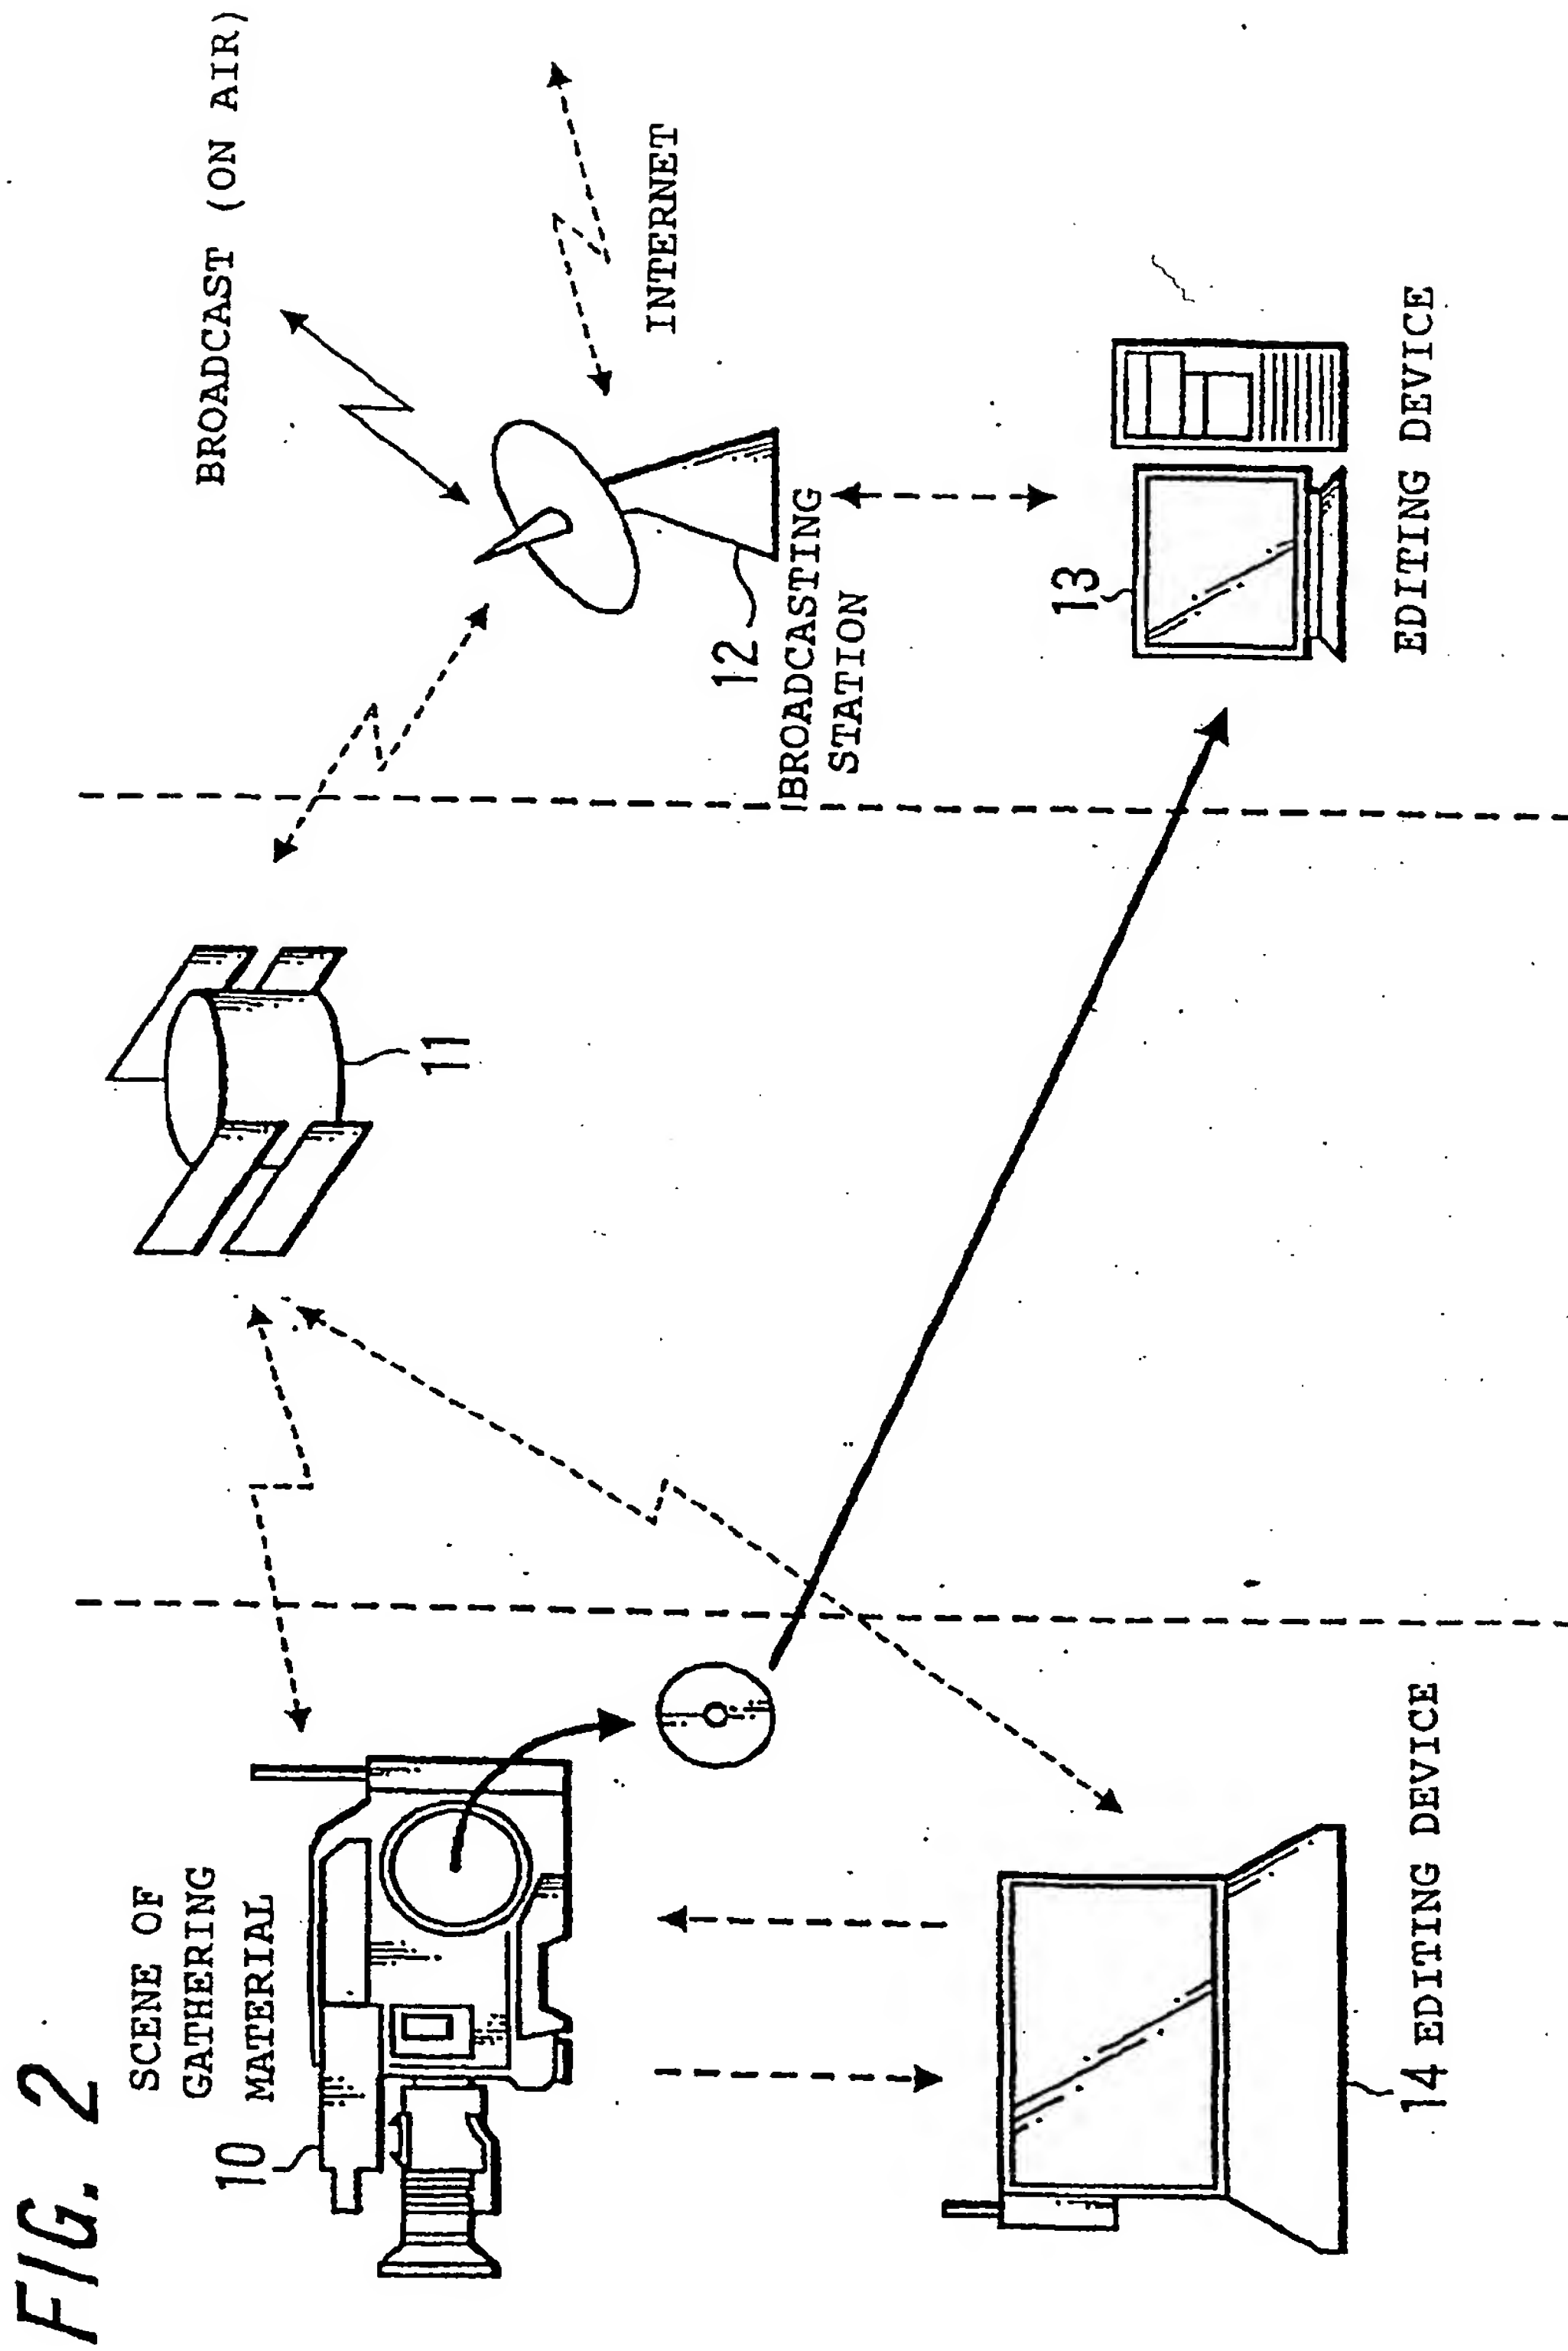


FIG. 3

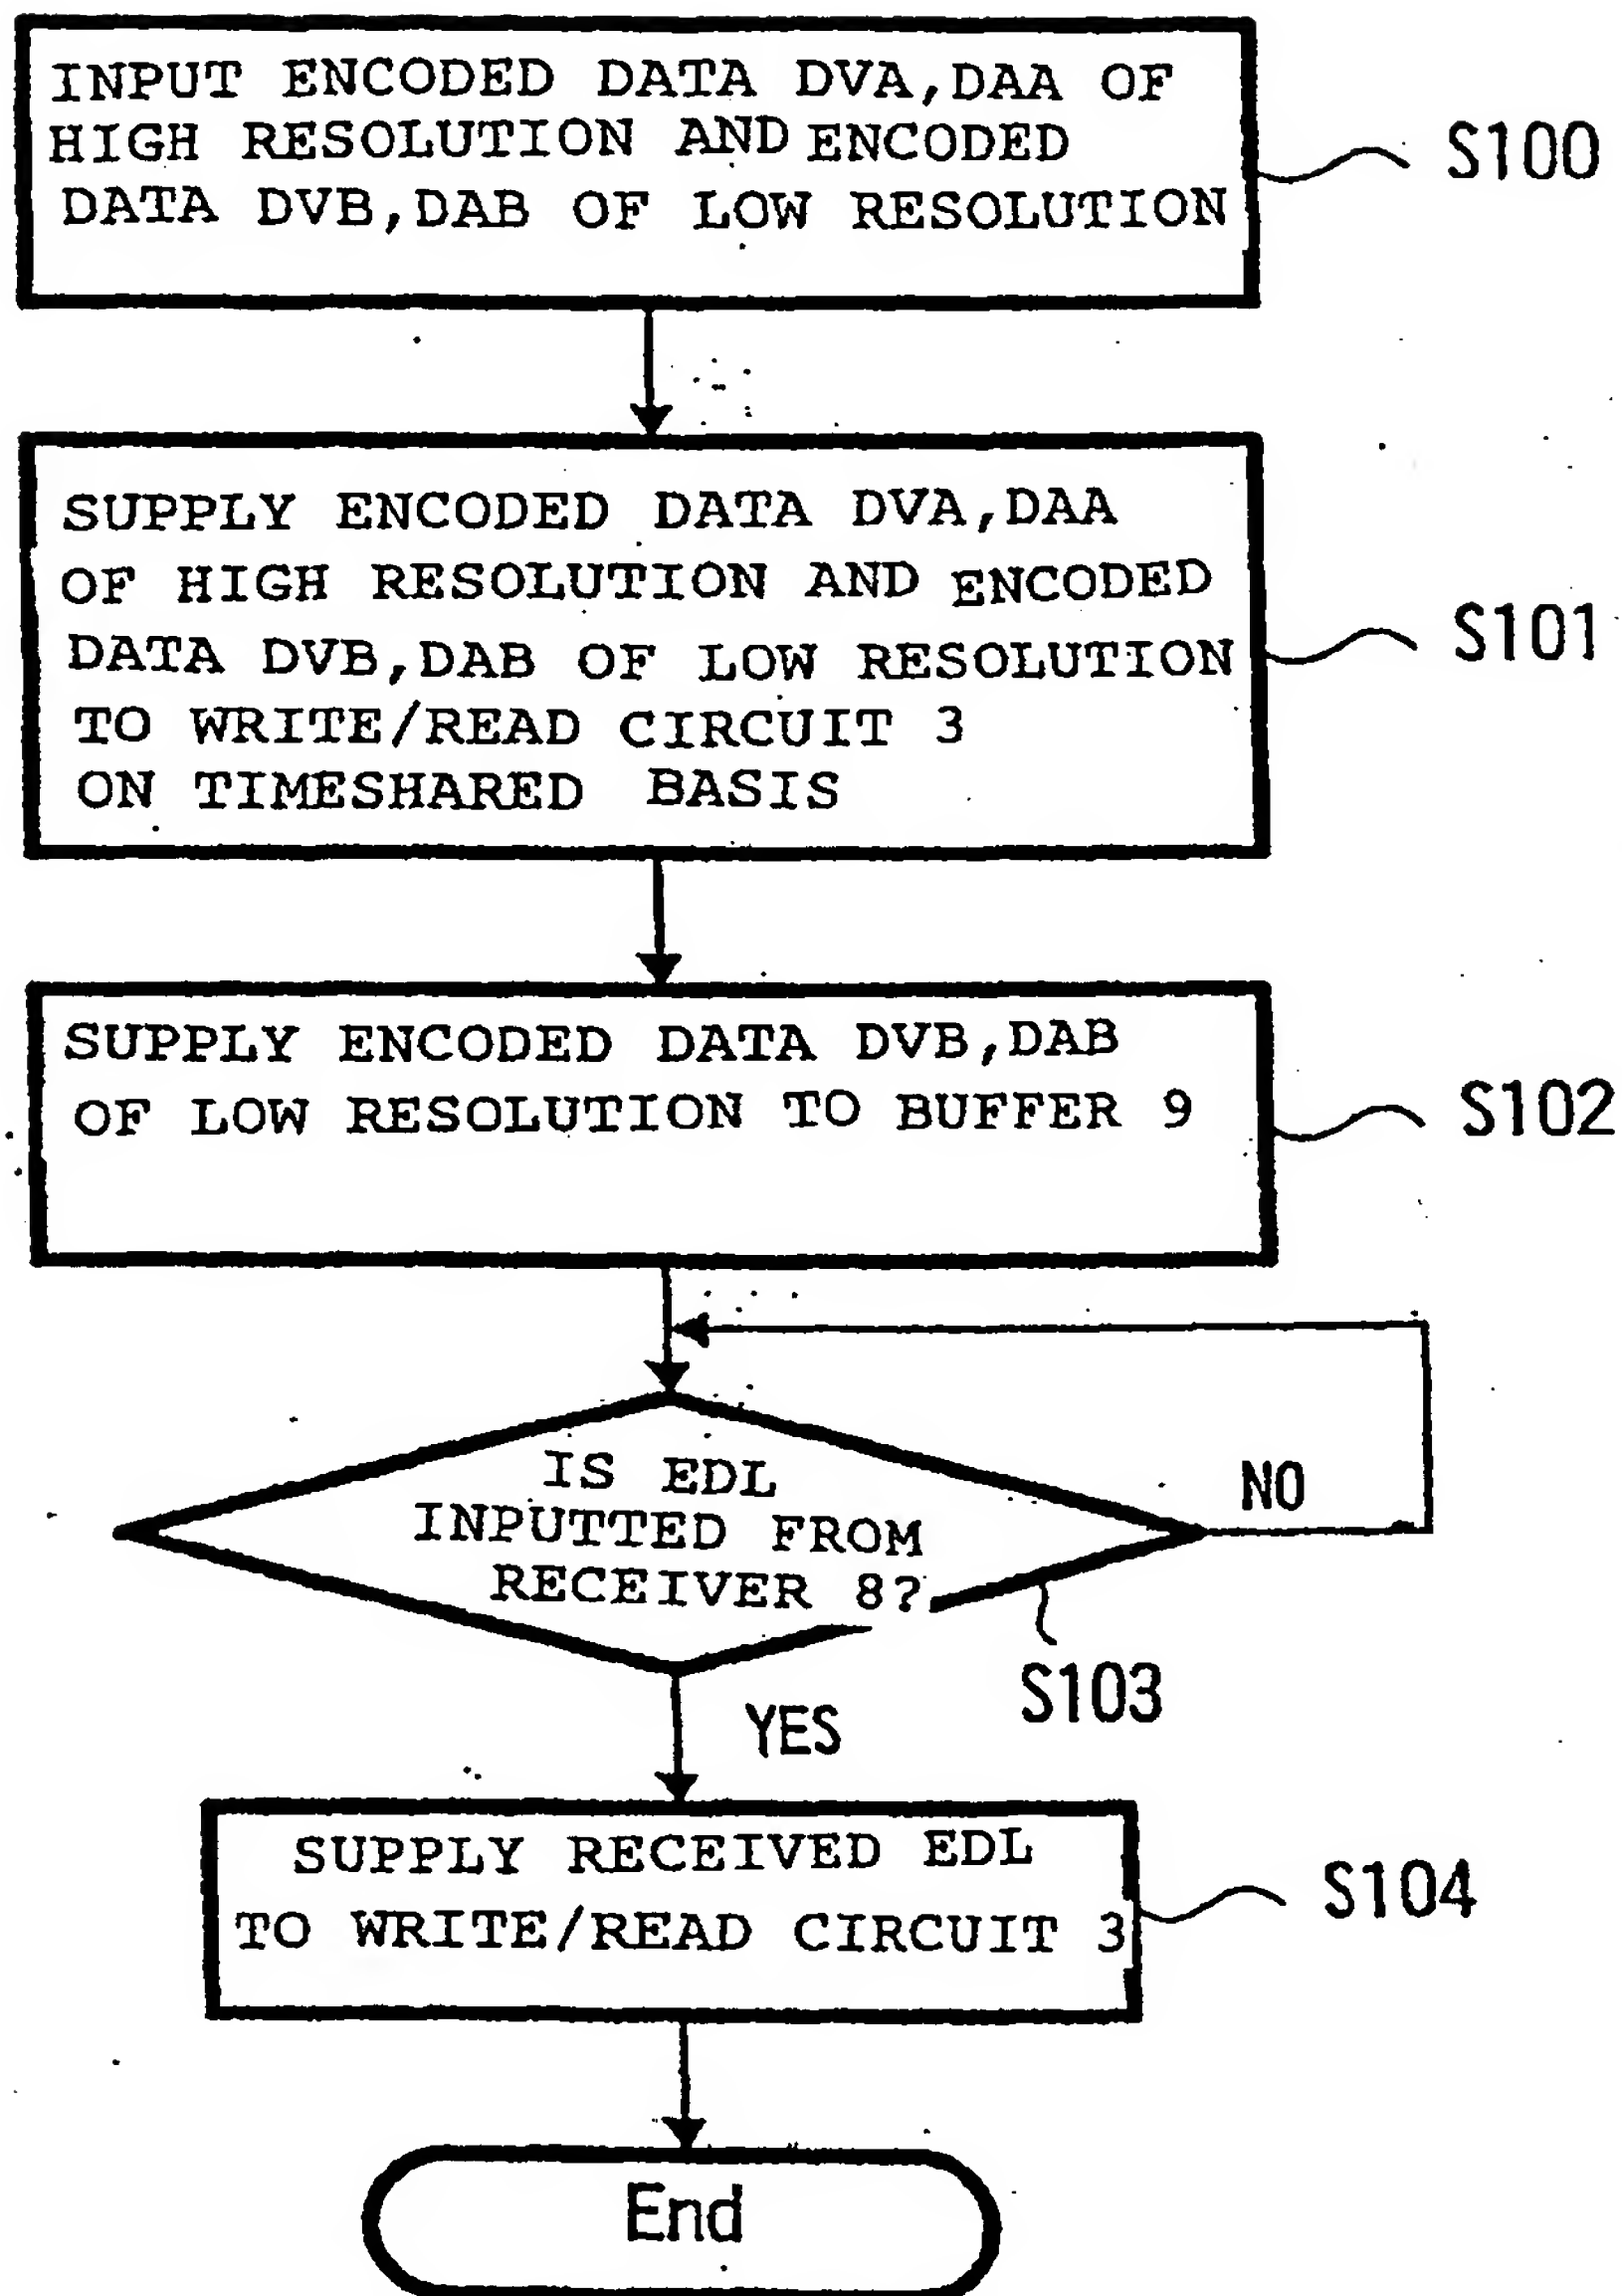

DESCRIPTION OF REFERENCE NUMERALS

- 1A: encoder (a second data processing means)
- 1B: encoder (a first data processing means)
- 2: controller
- 3: write/read circuit
- 4: storage medium
- 5: decoder
- 6: communicating section
- 7: transmitter (transmitter means)
- 8: receiver (receiver means)
- 9: buffer

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/00864

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> Int.Cl <sup>7</sup> H04N5/91, 5/92, G11B27/034		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) Int.Cl <sup>7</sup> H04N5/91-5/956, G11B27/034		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-1996 Toroku Jitsuyo Shinan Koho 1994-2001 Kokai Jitsuyo Shinan Koho 1971-2001 Jitsuyo Shinan Toroku Koho 1996-2001		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) JICST FILE (JOIS)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP, 11-136631, A (Sony Corporation), 21 May, 1999 (21.05.99), Full text; Figs. 1 to 3 (Family: none)	1-10
A	JP, 11-187349, A (Sony Corporation), 09 July, 1999 (09.07.99), Full text; Figs. 1 to 9 (Family: none)	1-10
A	JP, 8-279922, A (Sony Corporation), 22 October, 1996 (22.10.96), Full text; Figs. 1 to 6 (Family: none)	3, 8
A	JP, 11-195288, A (Sony Corporation), 21 July, 1999 (21.07.99), Full text; Figs. 1 to 14 (Family: none)	4, 9
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 13 April, 2001 (13.04.01)		Date of mailing of the international search report 24 April, 2001 (24.04.01)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)